


- APPLICATIONS:**
- Physical Access Control
 - Time and Attendance
 - Self Service Kiosk
 - Mobile Authentication
 - Point of Sale

SUPERIOR PERFORMANCE IN A COMPACT SIZE

- **Deliver a Superior User Experience** – Patented MSI technology ensures every user no matter the quality of their fingerprint (extra dry, wet, oily, dirty, aged and damaged) is properly enrolled and quickly matched
- **Reduce Financial Losses** – HID market leading liveness detection accurately and consistently identifies and rejects fake finger attempts
- **Increase User Throughput** – The capture of surface and subsurface fingerprint data significantly reduces false rejections for faster user throughput

Patented HID multispectral imaging (MSI) technology in a compact footprint. Multispectral imaging captures surface and subsurface biometric details enabling you to deliver a superior user experience without sacrificing security. The cost effective M210 OEM module is perfect for integration into access control devices, time and attendance clocks and self service kiosks.

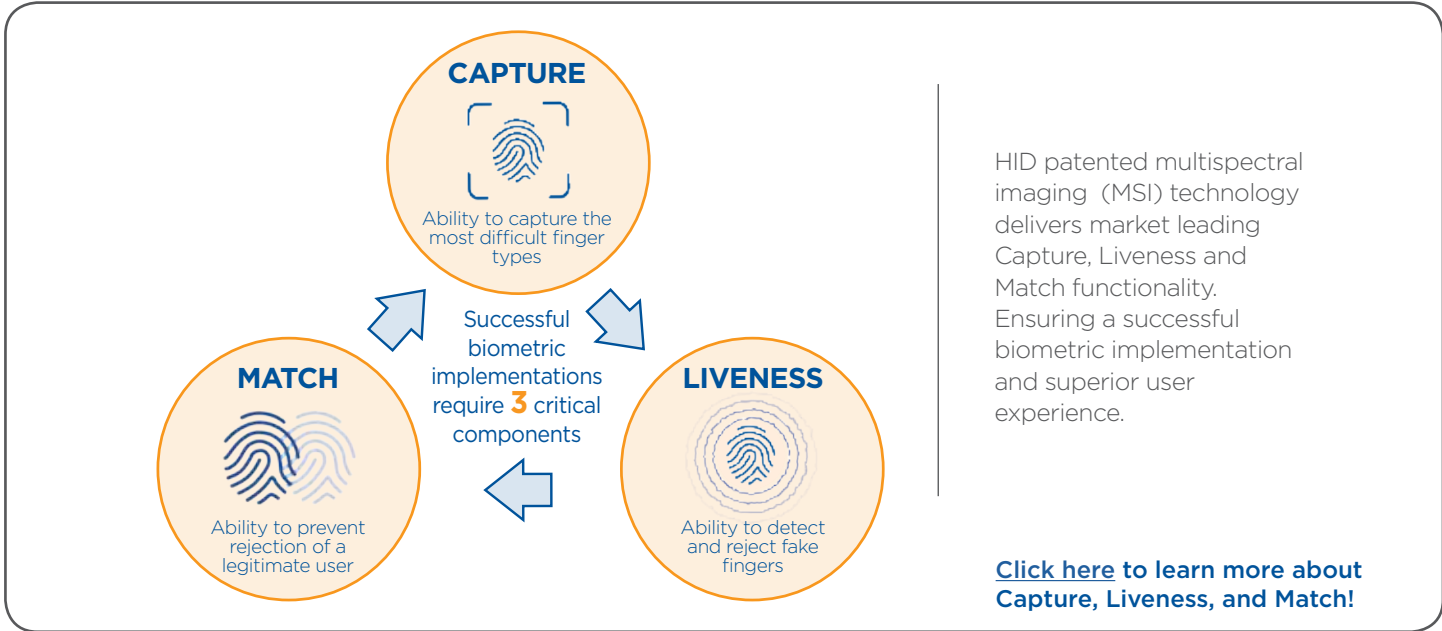


SPECIFICATIONS



M210

FINGERPRINT IMAGING SYSTEM	
Technology	Patented Lumidigm® Multispectral Imaging (MSI)
Output image resolution / bit depth	500 dpi / 8-bit, 256 grayscale
Platen area	0.55" x .69" (13.9mm x 17.4mm) rectangle, uncoated chemical resistant glass (no coatings to wear out)
BIOMETRIC FUNCTIONS	
Image output format	Uncompressed or WSQ compressed images (FBI Certified)
Template output format	ANSI 378 and ISO 19794-2 compliant (MINEX III certified)
Presentation Attack Detection (PAD)	ISO/IEC 30107-3, Level 1 Presentation Attack Detection (PAD) certified Patented Multispectral Imaging (MSI) Live Finger Detection (LFD)
Latent protection	User Configurable
BIOMETRIC PERFORMANCE	
Finger Detection to Image Out	1 sec. Embedded ARM (typical)
ENVIRONMENTAL RANGE	
Temperature (operating, with enclosure)	-10C to 60C
Humidity (operating, with enclosure)	0 - 95% RH
ESD Immunity	IEC 61000-4-2 level 4 (+/-15kV air discharge, 8kV contact discharge)
INTERFACE	
USB	USB 2.0 high speed (480 Mbps), Micro USB connector
Operating systems supported	Windows 10 (64-bit), Android (Lollipop or newer)
FORM FACTOR & DURABILITY	
Overall dimensions	1.44"W x 1.62"D x 1.54"H (36.8mm x 41.3mm x 39.3mm)
Enclosure	ABS Plastic
POWER SUPPLY REQUIREMENTS	
Supply current — operational	+5 VDC, 275 mA Operational (peak)
Supply current — idle	+5 VDC, 125 mA Idle (typical)
STANDARDS COMPLIANCE	
Interoperability	ANSI 378, ISO 19794-2, ISO/IEC 19784-1, MINEX III-certified algorithm, WHQL Drivers
Device certifications	CE, FCC, CB, UL
Environmental	REACH, RoHS, WEEE
Ingress	Ingress at platen IP65
Other	Australia/New Zealand, Mexico, South Africa

HID patented multispectral imaging (MSI) works on the most difficult finger types

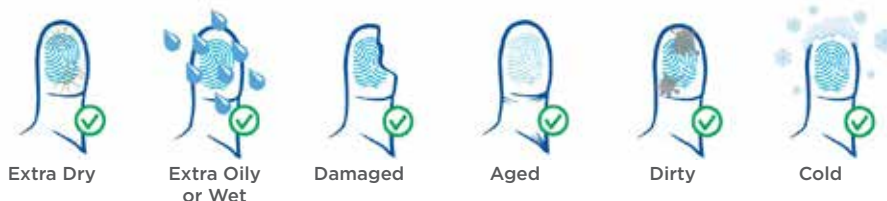

HID MSI ensures users have a fast, single touch experience and authorized users are not falsely rejected

North America: +1 512 776 9000
 Toll Free: +1 800 237 7769
 Europe, Middle East, Africa:
 +44 1440 714 850
 Asia Pacific: +852 3160 9800
 Latin America: +52 55 5081 1650

For Lumidigm inquiries: lumidigm@hidglobal.com

© 2019 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design and Lumidigm are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2019-09-18-lumidigm-m210-module-ds-en PLT-04579